

## K-STOKDRY A04 & A06

### SPRING REMOVAL FROM DRYER TUBES


The dryer head features a weight-activated valve that directs airflow only to the tubes holding boots, ensuring more efficient drying. However, casual or sports shoes may be too light to trigger the valve. In such cases, removing the internal spring allows for constant airflow, enabling effective drying of lighter footwear.



These toggles fix the head onto the tube. Depress both sides **VERY** carefully to avoid breaking them.




Use a pair of small flat head screw drivers to simultaneously depress both toggles and slide head off.

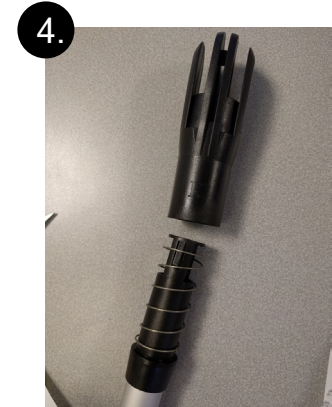

Unwind / remove spring.



Align toggles and return head to tube.

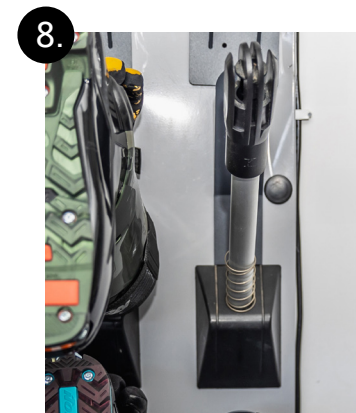

**HINT:** To avoid losing springs store them on the tube as pictured. Springs can be re-installed if desired in future.